



101001 HYDROCASE MICRO LED

- High corrosion resistance die-cast aluminum body and bracket
- Polyester painting with phosphocromating pre-finish
- **CREE LED "XP-G2" 1W**
- **Lumen output: 120 lm**
- Electronic transformer 220/240V 50/60Hz included
- Stainless steel screws
- Silicone rubber gasket
- Nickel-plated brass cable gland PG9
- 1 mt. neoprene power cable included

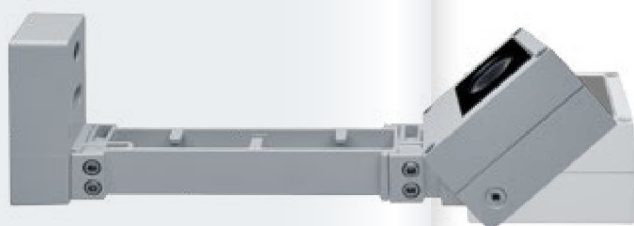

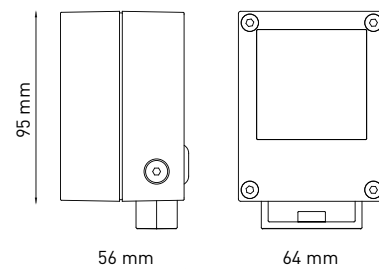


101002 - WITH EXTENDED FIXING BRACKET OPTION






1 WATT

220-240V 50-60HZ ELECTRONIC

IP65 - CE   

0,50 KG UNIT GROSS WEIGHT




LIGHT BEAM OPTIONS

-  10°
-  30°
-  45° (ON REQUEST)




BULB FEATURES

L.E.D.

LIGHT COLOURS

-  6000° K COLD WHITE
-  3000° K WARM WHITE
-  BLUE

AVAILABLE COLOURS

-  TEXTURE
-  MATT WHITE (ON REQUEST)
-  MATT BLACK (ON REQUEST)



AC022 - IP65 WALL-BASE WITH BRACKET OPTION

