


**203004 HYDROLINE 21 PERFORMANCE LED**



- High-corrosion resistance die-cast aluminum body
- Polyester painting with phosphocromating pre-finish
- Stainless steel frame AISI 304
- Stainless steel screws
- Stainless steel housing for recess included
- **Clear tempered glass**
- **CREE LED "XP-G2"**
- **31.5 WATT**
- **Lumen output: 3.150 lm**
- Electronic driver 220/240V 50/60Hz included
- Silicone rubber gasket
- Max static weight resistance 5.000 Kg
- Protection against impact IK10 (20 joule)
- Double cable-gland PG13.5
- 1 m power cable included



**31.5 WATT**

**190V... 250V/AC 50-60HZ**

**IP67 - CE**

**10,00 KG UNIT GROSS WEIGHT**

**LIGHT BEAM OPTIONS**

- SPOT 10°
- 30°
- 45° (ON REQUEST)

**BULB FEATURES**

**HIGH-POWER LED**



**LIGHT COLOURS**

- 6000° K COLD WHITE
- 3000° K WARM WHITE
- BLUE


**AVAILABLE COLOURS**

- STAINLESS STEEL

WHEN INSTALLING HYDROLINE, A "DRAINAGE BED" OF AT LEAST 20 CENTIMETERS HAS TO BE OBSERVED UNDER THE STAINLESS STEEL RECESSING BOX (GRAVEL AND SAND)

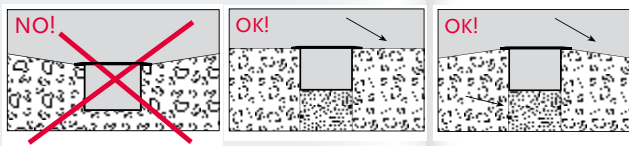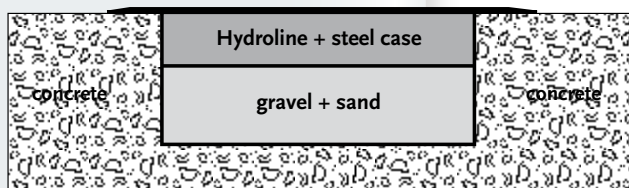

Only fixture



Stainless steel box

