





# 403002 HYDROLINE-B 21 | G5-T5

- **Symmetric reflector**
- 230 V (220 → 240V)  
short circuit and overload protected
- **21 watt**
- Stainless steel screws
- High corrosion resistance **die-cast aluminium body**
- Polyestere painting with phosphocromating pre-finishing
- Protection against impact **IK 10** (20 joule)
- T-5 **bulb G5** socket fluorescent
- Double Pg **13.5** cable gland (Ø 6÷12 mm wires)
- **Clear glass standard**  
(completely frosted glass on request)

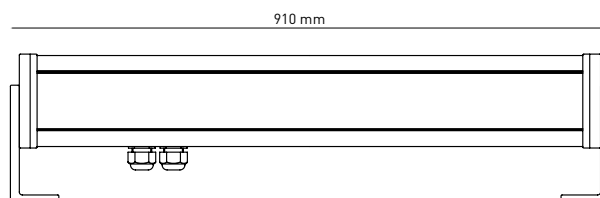

21 WATT


T5 / G5 ELECTRONIC

220-240 VOLTS / 50-60 HZ

IP67 - CE ▽ □

6,5 KG UNIT GROSS WEIGHT

LIGHT BEAM OPTIONS



BULB FEATURES

T5

LIGHT COLOURS

AVAILABLE COLOURS

- TEXTURE
- MATT WHITE (ON REQUEST)
- MATT BLACK (ON REQUEST)



**WARNING!**  
ALWAYS FOLLOW SYSTEM STANDARD RULES  
WHEN INSTALLING "HYDROLINE IP67".

STANDARD BRACKET (INCLUDED)



AC003: EXTENSIBLE BRACKETS FOR HYDROLINE-B  
DIE-CAST ALUMINUM (OPTION TO BE ORDERED SEPARATELY)

