



Garden edging

Colour: Classic Jarrah

for a natural look that lasts

size: 75×6×6000mm
150×6×6000mm



Composite wood and plastic


Easy installation:

We recommend that you unroll Garden edging on a flat area in direct sunlight for about an hour. This will allow you to work more easily with the edging. Garden composite edging is installed in a trench around the bed. It is staked on the inside edges, and the stakes are either a peg clip type or they are fastened (by screws or clips) to the edging to create a secure border around your garden or landscaped beds.

Things you'll need:

- Shovel
- Suitable steel or plastic garden edging stakes.
- 30mm long coated screws (if required).
- Rubber mallet.
- landscapers spray paint to mark out the path of the edging.

Maximum bending specifications:

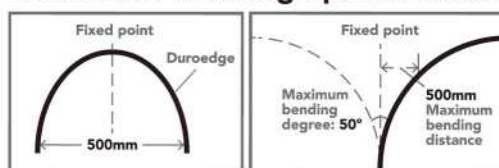

Garden edging is far more flexible than timber edging but not as flexible as plastic. Care needs to be taken when bending. Garden edging to create curves and shapes.



Low maintenance



Resistant to rot and decay



Termite resistant



Mould and mildew resistant



Weather resistant




Use standard tools



2 year limited warranty*

Garden edging is a wood composite material made from wood and plastic. It is used for edging around curved beds and is designed to provide the appearance of wood. The advantage of a composite edging over a wooden edging is that it is low in maintenance and bends more easily than wood gardening edging.

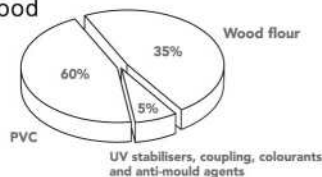











GreenScape Company

For Landscape & Geosynthetic Engineering

82, Bakhtiary Street
Sulaymanyah City
Kurdistan Region
Iraq

Tel: +964 (0) 53 319 5567
Mob: +964 (0) 770 1916556
+964 (0) 7503350735

Email: info@greenscape-ltd.com
Web: www.greenscape-ltd.com

